

RIGID - IMC

Right Angle Clamp and U-Bolts for Rigid Conduit, IMC & EMT

Application:

Designed to secure Rigid conduit, IMC, or EMT perpendicular to beam, channel and angle supports.

Features:

- Two hex nuts
- RoHS compliant

Standard Materials:


- Steel U-Bolts and nuts
- Malleable iron

Standard Finish:

Right Angle Clamp - Hot dip galvanized
U-Bolt - Mechanically galvanized


Applicable Third Party

Standards:
UL Standard: 2239



Right Angle Conduit Clamp

CATALOG NUMBER	TRADE SIZE	DIM A	DIM B	DIM C	DIM D	DIM E	PCS/UNITS PER BOX	WEIGHT PER C
SRAC50	1/2"	1"	1-1/4"	2-1/2"	1-13/16"	2-1/16"	140	34.9
SRAC75	3/4"	1-1/8"	1-3/8"	2-13/16"	1-13/16"	2-1/4"	120	38.6
SRAC100	1"	1-3/8"	1-5/8"	3-1/16"	1-13/16"	2-9/16"	100	43.8
SRAC125	1-1/4"	1-3/4"	2"	3-3/16"	1-13/16"	2-7/8"	90	48.5
SRAC150	1-1/2"	2"	2-3/8"	3-1/2"	1-13/16"	3-1/4"	80	54.8
SRAC200	2"	2-1/2"	2-1/2"	4-1/2"	2-5/8"	4-1/16"	45	92.6
SRAC250	2-1/2"	3"	3-1/4"	4-7/8"	2-5/8"	4-1/2"	40	106.5
SRAC300	3"	3-5/8"	3-7/8"	5-3/8"	2-5/8"	5-1/8"	35	126.4
SRAC350	3-1/2"	4-1/16"	4-9/16"	5-7/8"	2-5/8"	5-5/8"	30	136.0
SRAC400	4"	4-11/16"	5-1/16"	6-11/16"	2-5/8"	6-1/8"	25	163.4

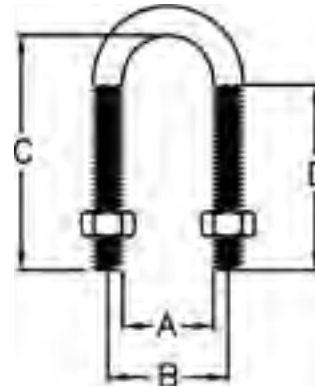

U-Bolts

CATALOG NUMBER	TRADE SIZE	THREAD SIZE	DIM A	DIM B	DIM C	DIM D	PCS/UNITS PER BOX	WEIGHT PER C
SUBM50	1/2"	5/16 - 18	1"	1-1/4"	2-1/2"	1-13/16"	400	12.5
SUBM75	3/4"	5/16 - 18	1-1/8"	1-3/8"	2-13/16"	1-13/16"	350	15.6
SUBM100	1"	5/16 - 18	1-3/8"	1-5/8"	3-1/16"	1-13/16"	300	15.7
SUBM125	1-1/4"	5/16 - 18	1-3/4"	2"	3-3/16"	1-13/16"	300	15.8
SUBM150	1-1/2"	5/16 - 18	2"	2-3/8"	3-1/2"	1-13/16"	250	18.8
SUBM200	2"	3/8 - 16	2-1/2"	2-1/2"	4-1/2"	2-5/8"	150	31.3
SUBM250	2-1/2"	3/8 - 16	3"	3-1/4"	4-7/8"	2-5/8"	140	31.4
SUBM300	3"	3/8 - 16	3-5/8"	3-7/8"	5-3/8"	2-5/8"	130	37.5
SUBM350	3-1/2"	3/8 - 16	4-1/16"	4-9/16"	5-7/8"	2-5/8"	120	40.6
SUBM400	4"	3/8 - 16	4-11/16"	5-1/16"	6-11/16"	2-5/8"	90	43.4

